




**LX-40 FLOOR
LEVELLER**

**LX-200 FLEX
LEVELLER**

**LX-360 FIBRE
LEVELLER**

Pack size	20KGS	20KGS	20KGS
Minimum bed depth	2mm	Feather Edge	3mm
Maximum bed depth	12mm	20mm	60mm
Time to foot traffic	4 hours	3 hours	3 hours
Time to accept tiles	4 hours	4 hours	4 hours
Time to accept soft coverings	24 hours	24 hours	24 hours
Mix Ratio	5:1	5:1	5:1
Coverage mm/m ²	1.6kg	1.7kg	1.7kg
Protein Free	✓	✓	✓
Pumpable	✓	✓	✓
Suitable surfaces:			
Concrete	✓	✓	✓
Cement:sand screed	✓	✓	✓
Terrazzo & Natural Stone	✓	✓	✓
Quarry Tiles	✓	✓	✓
Unglazed Ceramic Tiles	✓	✓	✓
Asphalt	x	✓	✓
Timber floors	x	x	✓
Underfloor heating	x	✓	✓

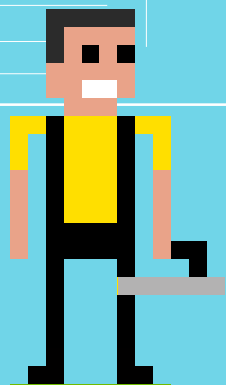

Introducing Dunlop LX

**A game-changing range
of floor levellers**

www.dunloptrade.com

Follow us



Dunlop Adhesives



@DunlopAdhesives



LX-40 FLOOR LEVELLER

- 2mm-12mm bed depth
- Sets in 4 hours
- Suitable for concrete floors
- Self levelling



LX-200 FLEX LEVELLER

- 0-20mm bed depth
- Sets in 3 hours
- Suitable for underfloor heating
- Flexible



LX-360 FIBRE LEVELLER

- 3mm-60mm bed depth
- Sets in 3 hours
- Suitable for timber floors
- Fibre reinforced

