



**England**

Building Adhesives Limited.  
Longton Road, Trentham,  
Stoke on Trent ST4 8JB.

Sales Department Telephone:

**01782 591 160**

Sales Department Fax:

**01782 591 131**

Technical Advisory Service Telephone:

**01782 591 120**

Technical Advisory Service Fax:

**01782 591 121**

**Ireland**

Unit 622, Phase III,  
Northwest Business Park,  
Ballycoolin, Dublin 15.

Telephone:

**00353 1 880 9210**

Fax:

**00353 1 880 9211**

 @DunlopAdhesives  DunlopAdhesives  Dunlop Trade

[www.dunloptrade.com](http://www.dunloptrade.com)

© 2020 Dunlop Adhesives | Porcel Bond™ A Trademark of Building Adhesives Ltd.  
Dunlop and the Flying D device are trademarks of Sumitomo Rubber Group  
and are used under license by Building Adhesives Ltd.


# PRODUCT GUIDE

[www.dunloptrade.com](http://www.dunloptrade.com)

# PACK ICONS WHAT TO LOOK OUT FOR

Each Dunlop product has icons on the front of the pack, making your selection quick and easy. Listed here are the icons to look out for on our range.

## BENEFITS

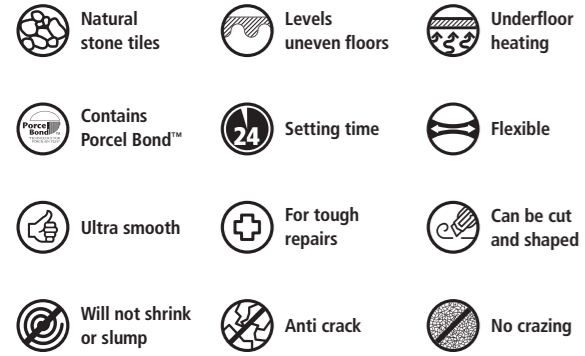

## LOCATIONS



## RESISTANCE



	READY MIXED ADHESIVES					POWDER ADHESIVES							GROUT	SEALANT
	RX-1000 Non Slip Wall Tile Adhesive	RX-2000 Showerproof Wall Tile Adhesive	RX-3000 Waterproof Wall Tile Adhesive	Multi Purpose Fix 'N' Grout	Tile-on-Wood	CX-24 Essential Tile Adhesive	CX-03 Fast Set Tile Adhesive	CF-24 Flexible Tile Adhesive	CF-03 Flexible Fast Set Tile Adhesive	CLF-03 Flexible Large Format & Natural Stone Adhesive	CS1-12 S1 Ultra Flexible Tile Adhesive	CS1-03 S1 Ultra Flexible Fast Set Tile Adhesive	GX-500 Flexible Floor & Wall Grout	FX-90 Silicone Sealant
<b>CLASSIFICATION</b>	D1T	D1TE	D2TE	D2T	-	C1T	C1F	C2TE	C2F	C2F	C2TES1	C2FS1	CG2WA	-
<b>COLOUR</b>	WHITE	BRILLIANT WHITE	WHITE	BRILLIANT WHITE	GREY / SANDSTONE	GREY / WHITE	GREY	GREY / WHITE	GREY / WHITE	GREY / WHITE	WHITE	WHITE	SEE PAGE 21	SEE PAGE 21
<b>SITUATION</b>	WALLS	WALLS	WALLS	WALLS	FLOORS	WALLS & FLOORS	WALLS & FLOORS	WALLS & FLOORS	WALLS & FLOORS	FLOORS	WALLS & FLOORS	WALLS & FLOORS	WALLS & FLOORS	WALLS & FLOORS
Interior (dry)	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Domestic showers	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Power showers	-	-	●	-	●	●	●	●	●	●	●	●	●	●
Swimming pools	-	-	-	-	-	-	-	●	●	-	●	●	●	●
Exterior	-	-	-	-	-	●	●	●	●	●	●	●	●	-
Heated screeds	-	-	-	-	-	-	-	●	●	●	●	●	●	●
Undertile heating	-	-	-	-	-	-	-	●	●	●	●	●	●	●
<b>WALL BACKGROUNDS</b>														
Fibre / lightweight cement boards	●	●	●	●	-	-	-	●	●	-	●	●	●	●
Rendering	●	●	●	●	-	●	●	●	●	-	●	●	●	●
Existing glazed tiles	●	●	●	●	-	●	●	●	●	-	●	●	●	●
Existing unglazed tiles	●	●	●	●	-	●	●	●	●	-	●	●	●	●
Plaster	●	●	●	●	-	●	●	●	●	-	●	●	●	●
Plasterboard	●	●	●	●	-	●	●	●	●	-	●	●	●	●
<b>FLOOR BACKGROUND</b>														
Cement: sand screed	-	-	-	-	-	●	●	●	●	●	●	●	●	●
Concrete	-	-	-	-	-	●	●	●	●	●	●	●	●	●
T & G floorboards	-	-	-	-	●	-	-	●	●	●	-	-	●	●
Plywood overlay	-	-	-	-	●	●	●	●	●	●	●	●	●	●
Vinyl (not cushion) tiles	-	-	-	-	-	●	●	●	●	●	●	●	●	●
Mastic asphalt flooring grade	-	-	-	-	-	●	●	●	●	●	●	●	●	●
Fibre / lightweight cement boards	-	-	-	-	-	●	●	●	●	●	●	●	●	●
Existing glazed tiles	-	-	-	-	-	●	●	●	●	●	●	●	●	●
Existing unglazed tiles	-	-	-	-	-	●	●	●	●	●	●	●	●	●
Calcium sulphate / Anhydrite screeds	-	-	-	-	-	●	●	●	●	●	●	●	●	●
<b>TILE TYPE</b>														
Ceramic	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Porcelain	-	-	-	-	-	●	●	●	●	●	●	●	●	●
Natural stone - translucent / water sensitive	-	-	-	-	-	-	●	-	●	●	-	●	●	-
Natural stone - non translucent	-	-	-	-	-	-	●	-	●	●	●	●	●	-
Mosaics - ceramic	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Mosaics - porcelain	-	-	●	-	-	●	●	●	●	●	●	●	●	●
Mosaics - natural stone	-	-	-	-	-	-	●	-	●	●	●	●	●	-
<b>PROPERTIES</b>														
Setting time in hours (based at 20°C)	24 MINIMUM	24 MINIMUM	24 MINIMUM	24 MINIMUM	24 MINIMUM	24	3	24	3	3	12-16	3	24	24
Bed thickness	3MM MAX.	3MM MAX.	3MM MAX.	3MM MAX.	3MM MAX.	3-6MM	3-6MM	3-6MM	3-6MM	3-25MM	2-6MM	2-6MM	-	6MM MAX. BEAD
Limited movement	-	-	●	-	●	●	●	●	●	●	●	●	●	●
Joint width	-	-	-	-	-	-	-	-	-	-	-	-	1-15MM	-

The above is a guideline only please refer to the information on the packaging and, for the latest information, the technical data sheet.

**Additional notes:** In shower areas and swimming pools a tanking system is recommended. Priming may be required on certain backgrounds. Consult the technical data sheet for further information. Always check the manufacturers instructions on heated floor systems, tiles and backer boards.



Contact our Technical Advisory Service on **01782 591 120**



Download product data sheets at **www.dunloptrade.com**

# CLASSIFICATIONS

## ADHESIVES AND GROUTS

Dunlop adhesives and grouts meet or exceed European standards according to classifications that define the type and properties of each product.

### ADHESIVES

---

*Under BS EN 12004: 2007+A1:2012*

#### Type

---



Cementitious  
*(e.g. cement based)*



Dispersion  
*(e.g. ready to use)*



Reaction resin  
*(e.g. epoxy)*

#### Characteristics

---



Fast-Setting



Reduced Slip



Extended open time

*Also, under BS EN 12002:2008*

---



Deformable



Highly deformable

### GROUTS

---

*Under BS EN 13888:2009*



Cementitious grout



High abrasion resistance



Reaction resin grout



Reduced water absorption

---

#### In any adhesive or grout classification above:

---



Normal characteristics



Improved/additional characteristics

## 10 YEAR GUARANTEE PRODUCTS GUARANTEED TO LAST LONGER

As a testament to the reliability and performance as well as our rigorous quality control procedures, all Dunlop products carry a 10-year guarantee.



01 Another reason to choose Dunlop products

02 Gives user complete peace-of-mind

03 A testament to our quality conscious production methods

04 Proof of exceptional product performance

## TECHNICAL SUPPORT ALWAYS HERE TO HELP!

At Dunlop we have a nationwide technical team who are on hand to offer practical knowledge, expert advice and training wherever and whenever you need it.

They are keen to ensure you have the knowledge to use our products with confidence and therefore hold regular Trade Days at stockists across the country. Come along and speak to our technical team about the latest Dunlop innovations, view demonstrations, pick up merchandise and discover the latest product promotions.

For more information on trade events visit our website:

[www.dunloptrade.com/trade-days](http://www.dunloptrade.com/trade-days)

## FIND THE RIGHT PRODUCTS WITH **DUNLOP JOB BUILD!**

Dunlop Job Build is a free and easy-to-use, mobile friendly online product selector tool designed to ensure you select the right product for your needs.

- ✓ Mobile friendly
- ✓ Get the right products
- ✓ Fast and accurate



To give Job Build a go, just visit our website:

[www.dunloptrade.com/job-build](http://www.dunloptrade.com/job-build)

## TILERS PRIMER

A ready to use acrylic primer used as a bonding aid or for sealing porous backgrounds prior to tiling.

- Easy to apply
- Reduces porosity
- Seals backgrounds
- Fast drying
- Coloured for easy application



SIZE

1KG

COLOUR



## SBR UNIVERSAL BONDING AGENT

Multi-purpose priming, sealing or use as an admixture.

- Admix for screeds and renders
- Improves flexibility
- Improves adhesion
- Provides water and frost resistance



SIZE

5KG

COLOUR



## TEMPORARY TILE SEALER

A temporary protective sealer for use on most tile types to protect the surface of the tile from discolouration when grouting.

- Easy to apply
- Reduces cleaning time
- Prevents staining
- Water based
- Washes off easily



SIZE

500G

COLOUR

CLEAR

## FLEXIBLE ADDITIVE

Multi-purpose admixture for improving adhesion and flexibility.

- Admix for adhesives and grouts
- Adds flexibility
- Improves adhesion
- Reduces permeability
- Mix with water



SIZE

2.5KG

COLOUR



## SHOWER WATERPROOFING KIT

An ideal waterproofing system for showers and wetrooms.

- Fully waterproof and leak proof
- Quick & easy to use
- Suitable for showers & wetrooms

### KIT CONTAINS

- Primer 500ml
- Waterproof coating 4.5KG
- Tape 100mm x 10m
- Matting 1m x 1m



SIZE **5KG**

COVERAGE **3.5m<sup>2</sup>**

## PROCOVER UNCOUPLING MAT

Uncoupling mat for tiling onto difficult floors such as timber and new sand and cement screeds.

- Perfect for underfloor or undertile heating
- Prevents cracking or debonding of tiles
- Simple to install
- 1mm mat depth
- Pre-marked gridlines
- No tape required



SIZE **1m x 5m**

COVERAGE **5m<sup>2</sup>**

## FLEXIBLE ACRYLIC FILLER

A high performance gunnable filler which can be used internally and externally for filling skirting boards, window and door frames.

- Can be used for repairing cracks and damage in walls and ceilings
- Overpaint in 60 minutes
- Anti-crack
- Ultra smooth
- Highly flexible



SIZE **310ml**

COLOUR 

## RAPID RESCUE REPAIR FILLER

A fast setting filler which can be used on internal and external\* repairs such as around pipework, door and window frames.

- Ideal for filling in chases, large cracks, holes and damage in cement sand renders
- For tough quick repairs
- Can be cut and shaped
- Will not shrink and slump
- Fully hard after 90 minutes



\* External dry areas only.



SIZE **1KG**

COLOUR 

## LX-40 FLOOR LEVELLER

Single part floor leveller for smoothing concrete floors.

- 2mm-12mm depth
- Sets in 4 hours
- Suitable for concrete floors
- Self levelling
- Pumpable



SIZE 20KG

COVERAGE 1.6kg/mm/m<sup>2</sup>

## LX-360 FIBRE LEVELLER

Single part floor leveller with added fibres for increased strength and flexibility.

- 3mm-60mm bed depth
- Sets in 3 hours
- Suitable for timber floors
- Fibre reinforced
- Pumpable




SIZE 20KG

COVERAGE 1.7kg/mm/m<sup>2</sup>

## LX-200 FLEX LEVELLER

Single part floor leveller with built in polymer for increased flexibility.

- 0-20mm bed depth\*
- Sets in 3 hours
- Suitable for underfloor heating
- Flexible
- Pumpable



\* 5-20mm max with the addition of 3mm single sized granite chippings.



SIZE 20KG

COVERAGE 1.6kg/mm/m<sup>2</sup>

## RX-1000 NON-SLIP WALL TILE ADHESIVE

Ceramic wall tile adhesive for kitchens and bathrooms.

- Ready mixed
- Easy to use
- Instant grab
- For internal wall tiles



SIZE	5KG, 15KG	COLOUR	○
CLASS	D1T	COVERAGE	2-3kg/m <sup>2</sup>

## RX-3000 WATERPROOF WALL TILE ADHESIVE

High performance ceramic wall tile adhesive for wet rooms, bathrooms and power showers in both domestic and commercial situations.

- Ready mixed
- Waterproof
- Instant grab
- For internal wall tiles
- Extended open time



SIZE	5KG, 15KG	COLOUR	○
CLASS	D2TE	COVERAGE	2-3kg/m <sup>2</sup>

## RX-2000 SHOWERPROOF WALL TILE ADHESIVE

Brilliant white ceramic wall tile adhesive for kitchens, bathrooms and domestic showers.

- Ready mixed
- Showerproof
- Instant grab
- For internal wall tiles
- Extended open time



SIZE	5KG, 15KG	COLOUR	○
CLASS	D1TE	COVERAGE	2-3kg/m <sup>2</sup>



## MULTI-PURPOSE FIX 'N' GROUT

Ready mixed all-in-one adhesive and grout for walls.

- All-in-one
- Non-slip
- Easy to use
- For walls



SIZE 1L, 2.5L, 5L

COLOUR

CLASS D2T

COVERAGE 2.5ltr/m<sup>2</sup>

## TILE-ON-WOOD

Ready mixed all-in-one adhesive and grout for floors.

- High bond strength
- Easy to use
- Water resistant
- For floors



SIZE 15KG

COLOUR

CLASS -

COVERAGE 5kg/m<sup>2</sup>

# THE NEW DUNLOP POWDER ADHESIVE RANGE THAT'S SIMPLE TO SELECT.

Your most wanted products – now easier to select!  
 New innovations to help you on tricky jobs  
 Simple, yet versatile for all your tiling needs.

**Catch Britain's most wanted today!**  
 Our technical team are on hand with expert advice, training and support.  
 For more information visit [www.dunloptrade.com](http://www.dunloptrade.com) or call **01782 591160**

@DunlopAdhesives

DunlopAdhesives

DunlopTrade

Dunlop and the Flying D device are trademarks of Sumitomo Rubber Group and are used under license by Building Adhesives Ltd.

## CX-24 ESSENTIAL TILE ADHESIVE

Standard setting floor and wall tile adhesive for ceramics and mosaics.

- For ceramic and mosaic tiles
- Interior and exterior use
- Excellent non-slip
- Easy to use

**Replaces:-**  
– Floor and Wall Tile Adhesive Grey and White



SIZE	20KG	COLOUR	<input type="radio"/> <input checked="" type="radio"/>
CLASS	C1T	COVERAGE	2-4kg/m <sup>2</sup>

## CF-24 FLEXIBLE TILE ADHESIVE

Flexible standard setting floor and wall tile adhesive for porcelain and ceramics.

- For porcelain and ceramic tiles
- Interior and exterior use
- Extended open time
- Easy to use

**Replaces:-**  
– Floor and Wall Plus Tile Adhesive Grey  
– Flexible Slowset Tile Adhesive White



SIZE	20KG	COLOUR	<input type="radio"/> <input checked="" type="radio"/>
CLASS	C2TE	COVERAGE	2-4kg/m <sup>2</sup>

## CX-03 FAST SET TILE ADHESIVE

Fast setting floor and wall tile adhesive for ceramics and mosaics.

- For ceramic and mosaic tiles
- Interior and exterior use
- Easy to use
- Sets in 3 hours

**Replaces:-**  
– Rapidset Floor and Wall Tile Adhesive Grey



SIZE	20KG	COLOUR	<input checked="" type="radio"/>
CLASS	C1F	COVERAGE	2-3.5kg/m <sup>2</sup>

## CF-03 FLEXIBLE FAST SET TILE ADHESIVE

Flexible fast setting floor and wall tile adhesive for porcelain and ceramics.

- For ceramic, porcelain and natural stone tiles
- Interior and exterior use
- Sets in 3 hours

**Replaces:-**  
– Set Fast Plus Flexible Tile Adhesive Grey  
– Flexible Rapidset Tile Adhesive White



SIZE	20KG	COLOUR	<input type="radio"/> <input checked="" type="radio"/>
CLASS	C2F	COVERAGE	2-4kg/m <sup>2</sup>

## CLF-03 FLEXIBLE LARGE FORMAT & NATURAL STONE ADHESIVE

Flexible thick bed pourable floor tile adhesive for large format and natural stone tiles.

- Ideal for natural stone, ceramic and porcelain tiles
- Interior and exterior use
- Flexible

### Replaces:-

- Large Format and Natural Stone Tile Adhesive Grey and White



SIZE	20KG	COLOUR	<input type="radio"/> <input checked="" type="radio"/>
CLASS	C2F	COVERAGE	8kg/m <sup>2</sup> (at 5mm bed depth)

## CS1-12 S1 ULTRA FLEXIBLE TILE ADHESIVE

S1 flexible, standard setting floor and wall tile adhesive.

- For ceramic, porcelain and natural stone tiles including large format
- Interior and exterior use
- Extended open time and pot life



SIZE	20KG	COLOUR	<input type="radio"/>
CLASS	C2TES1	COVERAGE	2-4kg/m <sup>2</sup>

## CS1-03 S1 ULTRA FLEXIBLE FAST SET TILE ADHESIVE

S1 flexible, fast setting floor and wall tile adhesive.

- For ceramic, porcelain and natural stone tiles including large format
- Interior and exterior use
- Extended pot life



SIZE	20KG	COLOUR	<input type="radio"/>
CLASS	C2FS1	COVERAGE	2-4kg/m <sup>2</sup>

## GX-500 FLEXIBLE GROUT

A flexible wall and floor grout available in eight colours for use with ceramic, porcelain, natural stone and mosaic tiles.

- Smooth, hardwearing finish
- 1-15mm joint widths
- All tile types
- Reduced efflorescence
- Matching FX-90 Silicone Sealant available



SIZE	2.5KG, 10KG	COLOUR	8 AVAILABLE (SEE OPPOSITE)
CLASS	CG2WA	COVERAGE	*0.25kg/m <sup>2</sup>

\*Approximate coverage based on 300mm x 300mm x 7mm with a 3mm joint.

## FX-90 SILICONE SEALANT

Tile, bath and shower silicone sealant with matching coloured tile grout.

- Multi-purpose
- Hygienic
- Waterproof



SIZE	310ML	COLOUR	8 AVAILABLE (SEE OPPOSITE)
CLASS	-	COVERAGE	12.5m (5mm bead)

## COLOURS

### GX-500 FLEXIBLE GROUT AND FX-90 SILICONE SEALANT

Our GX-500 flexible tile grout is available in **eight colours**, each with a matching FX-90 silicone sealant. Whatever the job, wet or dry, inside or outside, floors or walls, this versatile grout delivers a consistently smooth and hardwearing finish.

#### GX-500 FLEXIBLE GROUT AND FX-90 SILICONE SEALANT

Polar White	Jasmine Cream
Harvest Beige	Sahara Sand
Conker Brown	Mist Grey
Graphite Grey	Liquorice Black

#### OTHER GROUTS

White	Grey
-------	------

**Please note:** Whilst every care has been taken to achieve a true colour match, limitations in the printing process may cause some colour variation.

## WALL GROUT

Cement based wall grout for use with ceramic and mosaic tiles.

- Smooth finish
- Up to 3mm joint
- For ceramic and mosaic tiles
- Interior and exterior use



SIZE	3.5KG, 10KG	COLOUR	<input type="radio"/>
CLASS	CG1	COVERAGE	*0.25kg/m <sup>2</sup>

\*Approximate coverage based on 300mm x 300mm x 7mm with a 3mm joint.

## FLOOR & WALL GROUT

Cement based grout for use with ceramic and mosaic tiles.

- Hard wearing finish
- Up to 12mm joint
- For ceramic and mosaic tiles
- Interior and exterior use



SIZE	10KG	COLOUR	<input checked="" type="radio"/>
CLASS	CG1	COVERAGE	*0.25kg/m <sup>2</sup>

\*Approximate coverage based on 300mm x 300mm x 7mm with a 3mm joint.

## FLEXIBLE FLOOR & WALL GROUT

Polymer modified floor and wall grout for use with all tile types.

- Hard wearing finish
- Up to 20mm joint
- For porcelain and ceramic tiles
- Interior and exterior use



SIZE	10KG	COLOUR	<input type="radio"/> <input checked="" type="radio"/>
CLASS	CG2WA	COVERAGE	*0.25kg/m <sup>2</sup>

\*Approximate coverage based on 300mm x 300mm x 7mm with a 3mm joint.