




PRODUCT GUIDE

www.dunloptrade.com

PACK ICONS WHAT TO LOOK OUT FOR

Each Dunlop product has icons on the front of the pack, making your selection quick and easy. Listed here are the icons to look out for on our range.

BENEFITS

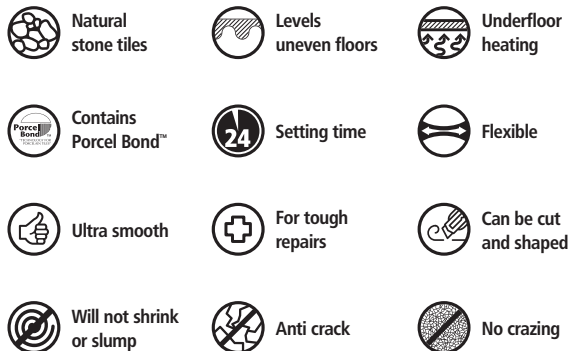

LOCATIONS



RESISTANCE



CLASSIFICATIONS ADHESIVES AND GROUTS

Dunlop adhesives and grouts meet or exceed European standards according to classifications that define the type and properties of each product.

ADHESIVES

Under BS EN 12004: 2007+A1:2012

Type

C Cementitious <i>(e.g. cement based)</i>	D Dispersion <i>(e.g. ready to use)</i>	R Reaction resin <i>(e.g. epoxy)</i>
--	--	---

Characteristics

F Fast-Setting	T Reduced Slip	E Extended open time
--------------------------	--------------------------	--------------------------------

Also, under BS EN 12002:2008

S1 Deformable	S2 Highly deformable
-------------------------	--------------------------------

GROUTS

Under BS EN 13888:2009

CG Cementitious grout	A High abrasion resistance
RG Reaction resin grout	W Reduced water absorption

In any adhesive or grout classification above:

1 Normal characteristics	2 Improved/additional characteristics
------------------------------------	---

10 YEAR GUARANTEE PRODUCTS GUARANTEED TO LAST LONGER

As a testament to the reliability and performance as well as our rigorous quality control procedures, all Dunlop products carry a 10-year guarantee.



01 Another reason to choose Dunlop products

02 Gives user complete peace-of-mind

03 A testament to our quality conscious production methods

04 Proof of exceptional product performance

TECHNICAL SUPPORT ALWAYS HERE TO HELP!

At Dunlop we have a nationwide technical team who are on hand to offer practical knowledge, expert advice and training wherever and whenever you need it.

They are keen to ensure you have the knowledge to use our products with confidence and therefore hold regular Trade Days at stockists across the country. Come along and speak to our technical team about the latest Dunlop innovations, view demonstrations, pick up merchandise and discover the latest product promotions.

For more information on trade events visit our website:

www.dunloptrade.com/trade-days

FIND THE RIGHT PRODUCTS WITH **DUNLOP JOB BUILD!**

Dunlop Job Build is a free and easy-to-use, mobile friendly online product selector tool designed to ensure you select the right product for your needs.

- ✓ Mobile friendly
- ✓ Get the right products
- ✓ Fast and accurate



To give Job Build a go, just visit our website:

www.dunloptrade.com/job-build

TILERS PRIMER

A ready to use acrylic primer used as a bonding aid or for sealing porous backgrounds prior to tiling.

- Easy to apply
- Reduces porosity
- Seals backgrounds
- Fast drying
- Coloured for easy application



SIZE

1KG

COLOUR



SBR UNIVERSAL BONDING AGENT

Multi-purpose priming, sealing or use as an admixture.

- Admix for screeds and renders
- Improves flexibility
- Improves adhesion
- Provides water and frost resistance



SIZE

5KG

COLOUR



TEMPORARY TILE SEALER

A temporary protective sealer for use on most tile types to protect the surface of the tile from discolouration when grouting.

- Easy to apply
- Reduces cleaning time
- Prevents staining
- Water based
- Washes off easily



SIZE

500G

COLOUR

CLEAR

FLEXIBLE ADDITIVE

Multi-purpose admixture for improving adhesion and flexibility.

- Admix for adhesives and grouts
- Adds flexibility
- Improves adhesion
- Reduces permeability
- Mix with water



SIZE

2.5KG

COLOUR



SHOWER WATERPROOFING KIT

An ideal waterproofing system for showers and wetrooms.

KIT CONTAINS

- Primer 500ml
- Waterproof coating 4.5KG
- Tape 100mm x 10m
- Matting 1m x 1m



SIZE **5KG** COVERAGE **3.5m²**

PROCOVER UNCOUPLING MAT

Uncoupling mat for tiling onto difficult floors such as timber floors and new sand and cement screeds.

- Perfect for underfloor or undertile heating
- Prevents cracking or debonding of tiles
- Simple to install
- 1mm mat depth
- Pre-marked gridlines
- No tape required



SIZE **1m x 5m** COVERAGE **5m²**

FLEXIBLE ACRYLIC FILLER

A high performance gunnable filler which can be used internally and externally for filling skirting boards, window and door frames.

- Can be used for repairing cracks and damage in walls and ceilings
- Overpaint in 60 minutes
- Anti-crack
- Ultra smooth
- Highly flexible



SIZE **310ml** COLOUR **○**

RAPID RESCUE REPAIR FILLER

A fast setting filler which can be used on internal and external* repairs such as around pipework, door and window frames.

- Ideal for filling in chases, large cracks, holes and damage in cement sand renders
- For tough quick repairs
- Can be cut and shaped
- Will not shrink and slump
- Fully hard after 90 minutes



* External dry areas only.



SIZE **1KG** COLOUR **●**

LX-40 FLOOR LEVELLER

Single part floor leveller for smoothing concrete floors.

- 2mm-12mm depth
- Sets in 4 hours
- Suitable for concrete floors
- Self levelling
- Pumpable



SIZE 20KG

COVERAGE 1.6kg/mm/m²

LX-360 FIBRE LEVELLER

Single part floor leveller with added fibres for increased strength and flexibility.

- 3mm-60mm bed depth
- Sets in 3 hours
- Suitable for timber floors
- Fibre reinforced
- Pumpable



SIZE 20KG

COVERAGE 1.7kg/mm/m²

LX-200 FLEX LEVELLER

Single part floor leveller with built in polymer for increased flexibility.

- 0-20mm bed depth*
- Sets in 3 hours
- Suitable for underfloor heating
- Flexible
- Pumpable



* 5-20mm max with the addition of 3mm single sized granite chippings.



SIZE 20KG

COVERAGE 1.6kg/mm/m²

RX-1000 NON-SLIP WALL TILE ADHESIVE

Ceramic wall tile adhesive for kitchens and bathrooms.

- Ready mixed
- Easy to use
- Instant grab
- For internal wall tiles



SIZE	5KG, 15KG	COLOUR	○
CLASS	D1T	COVERAGE	2-3kg/m ²

RX-3000 WATERPROOF WALL TILE ADHESIVE

High performance ceramic wall tile adhesive for wet rooms, bathrooms and power showers in both domestic and commercial situations.

- Ready mixed
- Waterproof
- Instant grab
- For internal wall tiles
- Extended open time



SIZE	5KG, 15KG	COLOUR	○
CLASS	D2TE	COVERAGE	2-3kg/m ²

RX-2000 SHOWERPROOF WALL TILE ADHESIVE

Brilliant white ceramic wall tile adhesive for kitchens, bathrooms and showers.

- Ready mixed
- Showerproof
- Instant grab
- For internal wall tiles
- Extended open time



SIZE	5KG, 15KG	COLOUR	○
CLASS	D1TE	COVERAGE	2-3kg/m ²

MULTI-PURPOSE FIX 'N' GROUT

Ready mixed all-in-one adhesive and grout for walls.

- All-in-one
- Non-slip
- Easy to use
- For walls



SIZE 1L, 2.5L, 5L

COLOUR

CLASS D2T

COVERAGE 2.5ltr/m²

FLOOR & WALL TILE ADHESIVE

Ceramic tile adhesive for floors and walls.

- Increased working time
- Easy to use
- For ceramic and mosaic tiles
- Interior and exterior use



SIZE 20KG

COLOUR

CLASS C1T

COVERAGE 2-4kg/m²

TILE-ON-WOOD

Ready mixed all-in-one adhesive and grout for floors.

- High bond strength
- Easy to use
- Water resistant
- For floors



SIZE 15KG

COLOUR

CLASS -

COVERAGE 5kg/m²

RAPIDSET FLOOR & WALL TILE ADHESIVE

Fast setting ceramic tile adhesive suitable for floors and walls.

- Sets in 3 hours
- Easy to use
- For ceramic and mosaic tiles
- Interior and exterior use



SIZE 5KG, 10KG, 20KG

COLOUR

CLASS C1F

COVERAGE 2-3.5kg/m²

FLOOR & WALL PLUS TILE ADHESIVE

Flexible floor and wall tile adhesive with extended open time.

- Increased open time
- For porcelain and ceramic tiles
- Interior and exterior use
- Flexible



SIZE	20KG	COLOUR	<input type="radio"/> <input checked="" type="radio"/>
CLASS	C2TE	COVERAGE	2-4kg/m ²

FLEXIBLE RAPIDSET FLOOR & WALL TILE ADHESIVE

Flexible fast setting tile adhesive for use with all tile types.

- Extended pot life
- Sets in 3 hours
- Easy to use and non-slip
- Suitable for porcelain, natural stone and large format wall tiles
- Interior and exterior use
- Flexible



SIZE	20KG	COLOUR	<input type="radio"/>
CLASS	C2F	COVERAGE	2-4kg/m ²

SET FAST PLUS FLEXIBLE TILE ADHESIVE

Flexible fast setting tile adhesive for use with all tile types.

- Flexible
- For porcelain and ceramic tiles
- Sets in 3 hours
- Interior and exterior use



SIZE	10KG (GREY ONLY), 20KG	COLOUR	<input type="radio"/> <input checked="" type="radio"/>
CLASS	C2FT	COVERAGE	2-4kg/m ²

FLEXIBLE SLOWSET FLOOR & WALL TILE ADHESIVE

Flexible slow setting tile adhesive – ideal for large format wall tiles.

- More time to fix tiles
- Longer open time
- Flexible
- For ceramic or porcelain tiles
- Interior and exterior



SIZE	20KG	COLOUR	<input type="radio"/>
CLASS	C2TE	COVERAGE	2-4kg/m ²

LARGE FORMAT & NATURAL STONE ADHESIVE

Pourable thickbed tile adhesive for use with natural stone and porcelain floor tiles.

- Flexible
- Pourable
- For floor tiling
- Interior and exterior use



SIZE	20KG	COLOUR	<input type="radio"/> <input checked="" type="radio"/>
CLASS	C2F	COVERAGE	8kg/m ² (at 5mm bed depth)

TILE ADHESIVE FOR GREEN SCREED

Tile to screeds after 24 hours, tile to concrete after 7 days.

- For fast track installations
- Increased flexibility
- Water and frost resistant
- For porcelain and ceramic tiles



SIZE	15KG	COLOUR	<input checked="" type="radio"/>
CLASS	C1S1	COVERAGE	4kg/m ²

2 PART RAPIDSET FLEX

Highly flexible floor tile adhesive for use on single layer timber floors.

- Highly deformable
- Sets in 3 hours
- For porcelain
- Fixes to most floors
- Interior and exterior use



SIZE	11.55KG	COLOUR	<input checked="" type="radio"/>
CLASS	C1S2	COVERAGE	4kg/m ²

GX-500 FLEXIBLE GROUT

A flexible wall and floor grout available in eight colours for use with ceramic, porcelain, natural stone and mosaic tiles.

- Smooth, hardwearing, finish
- 1-15mm joint widths
- All tile types
- Reduced efflorescence
- Matching FX-90 Silicone Sealant available



SIZE	2.5KG, 10KG	COLOUR	8 AVAILABLE (SEE OPPOSITE)
------	-------------	--------	----------------------------

CLASS	CG2WA	COVERAGE	*0.25kg/m ²
-------	-------	----------	------------------------

*Approximate coverage based on 300mm x 300mm x 7mm with a 3mm joint.

FX-90 SILICONE SEALANT

Tile, bath and shower silicone sealant with matching coloured tile grout.

- Multi-purpose
- Hygienic
- Waterproof



SIZE	310ML	COLOUR	8 AVAILABLE (SEE OPPOSITE)
------	-------	--------	----------------------------

CLASS	-	COVERAGE	12.5m (5mm bead)
-------	---	----------	------------------

COLOURS


GX-500 FLEXIBLE GROUT AND FX-90 SILICONE SEALANT

Our new flexible tile grout is available in **eight colours**, each with a matching FX-90 silicone sealant. Whatever the job, wet or dry, inside or outside, floors or walls, this versatile grout delivers a consistently smooth and hardwearing finish.

GX-500 FLEXIBLE GROUT AND FX-90 SILICONE SEALANT



OTHER GROUTS

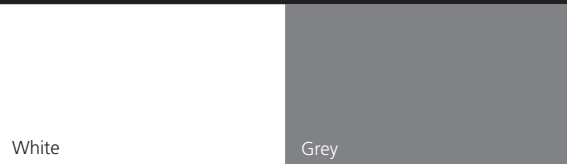



Please note: Whilst every care has been taken to achieve a true colour match, limitations in the printing process may cause some colour variation.

WALL GROUT

Cement based wall grout for use with ceramic and mosaic tiles.

- Smooth finish
- Up to 3mm joint
- For ceramic and mosaic tiles
- Interior and exterior use






SIZE	3.5KG, 10KG	COLOUR	○
CLASS	CG1	COVERAGE	*0.25kg/m ²


*Approximate coverage based on 300mm x 300mm x 7mm with a 3mm joint.

FLOOR & WALL GROUT

Cement based grout for use with ceramic and mosaic tiles.

- Hard wearing finish
- Up to 12mm joint
- For ceramic and mosaic tiles
- Interior and exterior use





SIZE	10KG	COLOUR	●
CLASS	CG1	COVERAGE	*0.25kg/m ²

*Approximate coverage based on 300mm x 300mm x 7mm with a 3mm joint.

FLEXIBLE FLOOR & WALL GROUT

Polymer modified floor and wall grout for use with all tile types.

- Hard wearing finish
- Up to 20mm joint
- For porcelain and ceramic tiles
- Interior and exterior use





SIZE	10KG	COLOUR	○ ●
CLASS	CG2WA	COVERAGE	*0.25kg/m ²

*Approximate coverage based on 300mm x 300mm x 7mm with a 3mm joint.

	READY MIXED ADHESIVES					POWDER ADHESIVES								GROUT	SEALANT
	RX-1000 Non Slip Wall Tile Adhesive	RX-2000 Showerproof Wall Tile Adhesive	RX-3000 Waterproof Wall Tile Adhesive	Multi Purpose Fix 'N' Grout	Tile-on-Wood	Flexible Slowset Floor & Wall Tile Adhesive	Flexible Rapidset Floor & Wall Tile Adhesive	Floor & Wall Tile Adhesive	Rapidset Floor & Wall Tile Adhesive	Floor & Wall Plus Tile Adhesive	Set Fast Plus Flexible Floor & Wall Tile Adhesive	Large Format & Natural Stone Tile Adhesive	2-Part Rapidset Flex	GX-500 Flexible Floor & Wall Grout	FX-90 Silicone Sealant
CLASSIFICATION	D1T	D1TE	D2TE	D2T	-	C2TE	C2F	C1T	C1F	C2TE	C2FT	C2F	C1S2	CG2WA	-
COLOUR	WHITE	BRILLIANT WHITE	WHITE	BRILLIANT WHITE	GREY / SANDSTONE	WHITE	WHITE	GREY / WHITE	GREY	GREY / WHITE	GREY / WHITE	GREY / WHITE	GREY	SEE PAGE 21	SEE PAGE 21
SITUATION	WALLS	WALLS	WALLS	WALLS	FLOORS	WALLS & FLOORS	WALLS & FLOORS	WALLS & FLOORS	WALLS & FLOORS	WALLS & FLOORS	WALLS & FLOORS	FLOORS	FLOORS	WALLS & FLOORS	WALLS & FLOORS
Interior (dry)	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Domestic showers	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Power showers	-	-	●	-	●	●	●	●	●	●	●	●	●	●	●
Swimming pools	-	-	-	-	-	●	●	-	-	●	●	-	●	●	●
Exterior	-	-	-	-	-	●	●	●	●	●	●	●	●	●	-
Heated screeds	-	-	-	-	-	●	●	-	-	●	●	●	●	●	●
Undertile heating	-	-	-	-	-	●	●	-	-	●	●	●	●	●	●
WALL BACKGROUNDS															
Fibre / lightweight cement boards	●	●	●	●	-	●	●	-	-	●	●	-	-	●	●
Rendering	●	●	●	●	-	●	●	●	●	●	●	-	-	●	●
Existing glazed tiles	●	●	●	●	-	●	●	●	●	●	●	-	-	●	●
Existing unglazed tiles	●	●	●	●	-	●	●	●	●	●	●	-	-	●	●
Plaster	●	●	●	●	-	●	●	●	●	●	●	-	-	●	●
Plasterboard	●	●	●	●	-	●	●	●	●	●	●	-	-	●	●
FLOOR BACKGROUND															
Cement: sand screed	-	-	-	-	-	●	●	●	●	●	●	●	●	●	●
Concrete	-	-	-	-	-	●	●	●	●	●	●	●	●	●	●
T & G floorboards	-	-	-	-	●	●	●	-	-	●	●	●	●	●	●
Plywood overlay	-	-	-	-	●	●	●	●	●	●	●	●	●	●	●
Vinyl (not cushion) tiles	-	-	-	-	-	●	●	●	●	●	●	●	●	●	●
Mastic asphalt flooring grade	-	-	-	-	-	●	●	●	●	●	●	●	●	●	●
Fibre / lightweight cement boards	-	-	-	-	-	●	●	●	●	●	●	●	●	●	●
Existing glazed tiles	-	-	-	-	-	●	●	●	●	●	●	●	●	●	●
Existing unglazed tiles	-	-	-	-	-	●	●	●	●	●	●	●	●	●	●
Anhydrite screeds	-	-	-	-	-	●	●	●	●	●	●	●	●	●	●
TILE TYPE															
Ceramic	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Porcelain	-	-	-	-	-	●	●	●	●	●	●	●	●	●	●
Natural stone - translucent / water sensitive	-	-	-	-	-	-	●	-	-	●	●	-	-	●	-
Natural stone - non translucent	-	-	-	-	-	-	●	-	-	●	●	●	●	●	-
Mosaics - ceramic	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Mosaics - porcelain	-	-	●	-	-	●	●	●	●	●	●	●	●	●	●
Mosaics - natural stone	-	-	-	-	-	-	●	-	●	-	●	●	●	●	-
PROPERTIES															
Setting time in hours (based at 20°C)	24 MINIMUM	24 MINIMUM	24 MINIMUM	24 MINIMUM	24 MINIMUM	24	3	24	3	24	3	3	3	24	24
Bed thickness	3MM MAX.	3MM MAX.	3MM MAX.	3MM MAX.	3MM MAX.	3-6MM	3-6MM	3-6MM	3-6MM	3-6MM	3-6MM	3-25MM	3-5MM	-	6MM MAX. BEAD
Limited movement	-	-	●	-	●	●	●	●	●	●	●	●	●	●	●
Joint width	-	-	-	-	-	-	-	-	-	-	-	-	-	1-15MM	-

The above is a guideline only please refer the information on the packaging and, for the latest information, the technical data sheet.

Additional notes: In shower areas and swimming pools a tanking system is recommended. Priming may be required on certain backgrounds. Consult the technical data sheet for further information. Always check the manufacturers instructions on heated floor systems, tiles and backer boards.



England

Building Adhesives Limited.
Longton Road, Trentham,
Stoke on Trent ST4 8JB.

Sales Department Telephone:

01782 591 160

Sales Department Fax:

01782 591 131

Technical Advisory Service Telephone:

01782 591 120

Technical Advisory Service Fax:

01782 591 121

Ireland

Unit 622, Phase III,
North West Business Park,
Ballycoolin, Dublin 15.

Telephone:

00353 1 880 9210

Fax:

00353 1 880 9211



@DunlopAdhesives



DunlopAdhesives



Dunlop Trade

www.dunloptrade.com

© 2018 Dunlop Adhesives | Porcel Bond™ A Trademark of Building Adhesives Ltd.
DUNLOP and the FLYING D Device are trademarks of Dunlop International Group
and are used under licence by Building Adhesives Ltd.